


## Specification Sheet



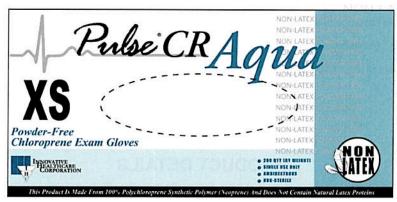

Pulse® CR is manufactured in compliance with multiple international standards, including the following:

Designation	Standard Standard	
ASTM D6977	Standard Specification for Polychloroprene Examination Gloves for Medical Application	
ASTM D5151	Standard Test Method for Detection of Holes in Medical Gloves	
ASTM F1671	Standard Test Method for Resistance of Materials Used in Protective Clothing to Penetration by Blood-Borne Pathogens	
ASTM D6978	Standard Practice for Assessment of Resistance of Medical Gloves to Permeation by Chemotherapy Drugs	

Average Length	Average Palm Thickness	Average Finger Thickness	
9.5 in <b>◆</b> 240 mm	2.8 mil + 0.07 mm	3.5 mil ◆ 0.09 mm	

Tensile Strength & Elongation	Before Aging	After Accelerated Aging
Tensile Strength (Mpa)	15.9	20.9
ASTM Requirement Min. (Mpa)	14	14
Elongation (%)	817	732
ASTM Requirement Min. (%)	500	400





